

RECTIFIERS

ISOLATED HIGH CURRENT

70nS•150nS•3000nS RECOVERY

LTI 102	LTI 102F	LTI 102UF
LTI 104	LTI 104F	LTI 104UF
LTI 106	LTI 106F	LTI 106UF
LTI 108	LTI 108F	LTI 108UF
LTI 110	LTI 110F	LTI 110UF

$$V_{RWM} = 200-1000V$$

$$I_F = 15A$$

VOLTAGE MULTIPLIERS INC

Assemblies available with
diodes screened to JANTX
or JANTXV. Consult sales
office.

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage - (V _{rwm})	Average Rectified Current - (I _o)		Reverse Current @ V _{RWM} - (I _r)		Forward Voltage - (V _f)		1 Cycle Surge Current t _p =8.3mS (I _{fsm})	Repetitive Surge Current - (I _{frm})	Reverse Recovery Time (1) (T _{rr})	Thermal Impedance (2) - (J-C)
		55°C	100°C	25°C	100°C	25°C		25°C	25°C	25°C	
		Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	Nano Sec	°C/W
LTI102	200	15.0	10.0	1.0	20	1.1	9.0	150	25	3000	3
LTI104	400	15.0	10.0	1.0	20	1.1	9.0	150	25	3000	3
LTI106	600	15.0	10.0	1.0	20	1.1	9.0	150	25	3000	3
LTI108	800	15.0	10.0	1.0	20	1.2	9.0	150	25	3000	3
LTI110	1000	15.0	10.0	1.0	20	1.2	9.0	150	25	3000	3
LTI102F	200	15.0	10.0	1.0	20	1.5	9.0	150	25	150	3
LTI104F	400	15.0	10.0	1.0	20	1.5	9.0	150	25	150	3
LTI106F	600	15.0	10.0	1.0	20	1.5	9.0	150	25	150	3
LTI108F	800	15.0	10.0	1.0	20	1.8	9.0	150	25	150	3
LTI110F	1000	15.0	10.0	1.0	20	1.8	9.0	150	25	150	3
LTI102UF	200	12.0	8.0	1.0	20	1.7	9.0	150	25	70	3
LTI104UF	400	12.0	8.0	1.0	20	1.7	9.0	150	25	70	3
LTI106UF	600	12.0	8.0	1.0	20	1.7	9.0	150	25	70	3
LTI108UF	800	12.0	8.0	1.0	20	2.1	9.0	150	25	70	3
LTI110UF	1000	12.0	8.0	1.0	20	2.1	9.0	150	25	70	3

Notes:

(1) T_{rr} measured on diodes
prior to assembly.

I_F=0.5A, I_R=1.0A,

IRR=0.25A

(2) Operating Temperature

-65°C to +150°C

Storage Temperature

-65°C to +175°C

Isolation Voltage: 2000V (terminals to case)

Screening available.

(See Appendix D)

Contact our Applications
Engineering Dept. for
custom configurations.



VOLTAGE MULTIPLIERS INC.

8711 W. Roosevelt Ave.

Visalia, CA., 93291


Tel. 209-651-1402
www.DataSheet4U.com
Telex 530484
Fax 209-651-0740

RECTIFIERS


ISOLATED HIGH CURRENT

70nS•150nS•3000nS RECOVERY


LTI 102	LTI 102F	LTI 102UF
LTI 104	LTI 104F	LTI 104UF
LTI 106	LTI 106F	LTI 106UF
LTI 108	LTI 108F	LTI 108UF
LTI 110	LTI 110F	LTI 110UF

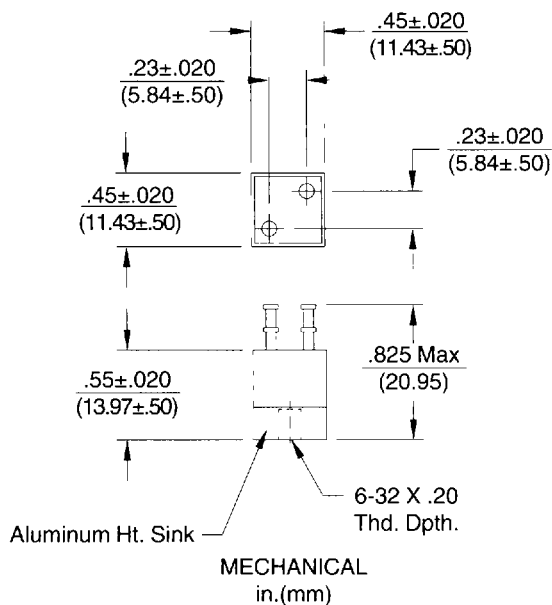


TYPICAL
FORWARD VOLTAGE VS.
FORWARD CURRENT
AT 25°C

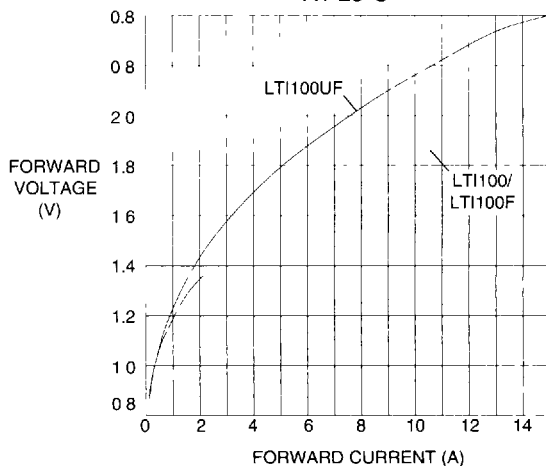

TYPICAL
REVERSE CURRENT VS. TEMPERATURE
AT PIV

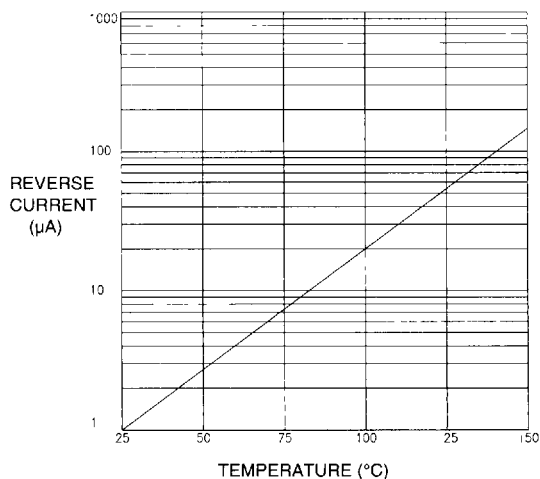

MAXIMUM
FORWARD CURRENT VS. HEAT SINK
TEMPERATURE

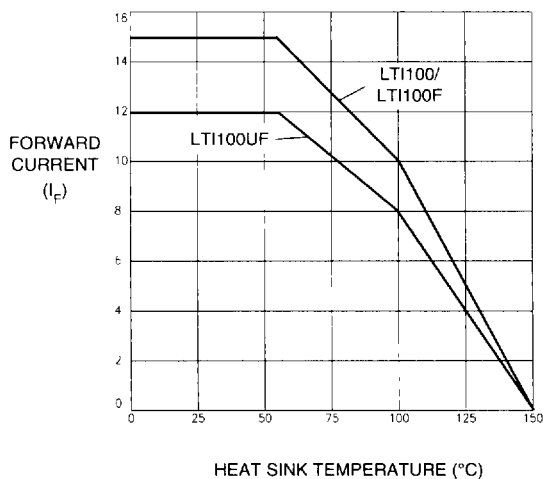

VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA., 93291

Tel. 209-651-1402
Telex 530484
Fax 209-651-0740